METALTECH®

SET OF 4 OUTRIGGERS

MODEL : **I-CISO4**

OPERATIONAL SAFETY AND ASSEMBLY INSTRUCTIONS

COMPATIBLE METALTECH JOBSITE SERIES 6′ BAKER MODELS: I-CISC & I-CAISC

Picture may differ from actual product

READ THESE INSTRUCTIONS CAREFULLY BEFORE USING THIS PRODUCT. KEEP THIS MANUAL HANDY FOR FUTURE REFERENCE.

2 YEAR WARRANTY

OSHA MEETS 29 CFR Pt. 1926

ANSI MEETS CODE A10.8

CSA MEETS CSA STANDARD

Customer Service: 1 800 363-7587

Our customer service staff is available to help you. For help with product assembly, to report damaged or missing parts, or for any other information about this product, please call our toll-free number.

KEEP THIS MANUAL FOR FUTURE REFERENCE

Keep this manual and the original sales invoice in a safe, dry place for future reference.

Two-Year Limited Warranty

Metaltech-Omega Inc. guarantees this product against any material defect. Please return this product, freight prepaid, to Metaltech-Omega Inc. At its own discretion, Metaltech-Omega Inc. will replace or repair this product and return it within a reasonable time. This warranty does not cover any damage(s) caused by any incorrect or inappropriate use, care or maintenance. Proof of purchase must accompany the return.

METALTECH®
WWW.METALTECH.INFO
1 800 363-7587
LAVAL, QUEBEC, CANADA H7L 3N6

DESIGNED IN CANADA

Metaltech is a registered trademark of Metaltech-Omega inc.

DESIGNED IN CANADA / MADE IN CHINA

IN-CISO4-NA-EN08

OPERATIONAL SAFETY

READ BEFORE BEGINNING ASSEMBLY.

FAILURE TO UNDERSTAND AND FOLLOW ALL SAFETY RULES AND ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

USER ASSUMES RISK OF PERSONAL INJURY BY FAILURE TO READ AND FOLLOW MANUFACTURER'S SAFETY RULES AND ASSEMBLY INSTRUCTIONS, AND BY FAILURE TO OBSERVE FEDERAL, PROVINCIAL/STATE AND MUNICIPAL CODES.

METAL CONDUCTS ELECTRICITY:
Do not use this equipment where contact may be made with power lines or other live electrical circuits.

OPERATION AND SAFETY

- Always use this scaffold in conformity with local or national legislation which applies.
- Never stack more than two units.
- Always use outriggers and guardrails when stacking units.
- Inspect before use. Do not use scaffold if damaged or parts are missing.
- Examine thoroughly to make sure unit is properly set up.
- Before scaffold units are to be stacked, a set of (4) Outriggers with casters shall be installed on the base section of scaffolding. The casters must be the same size as the casters in the base scaffold.
- Outrigger must be flush against scaffold leg and caster must be in contact with the surface.
- Guardrails must be installed on all open sides of a work platform where a person could fall from a height of 6 ft (1.8 m) or more.
- Always fasten the guardrails system to the structure using locking pins or bolts.
- Securely lock all braces and platform before each use.
- There must be a minimum of two side braces installed on each scaffold level and evenly spaced throughout the scaffold. Lack of adequate bracing could cause scaffold to collapse.
- The casters must be the same size as the casters in the base scaffold.
- Always use casters locked to the structure with the locking pins.
- Do not climb unless all casters are in locked position.
- Lock the casters on the outriggers each time you lock the casters on the base scaffold. This is to be done prior to climbing the scaffolding.
- Erect to be plumb on firm and level surface.
- This scaffold must be used on a firm surface that is free of pits, debris, holes or obstructions.
- Never place anything under or attach anything to this scaffold to increase height or to adjust to uneven surfaces.
- Acids are corrosive and can seriously affect strength. Do not expose this scaffold to corrosive substances.
- Keep scaffold free of debris and unnecessary equipment.
- Always keep body centered inside structure of scaffold.
- Remove or fasten all tools, material or equipment before moving. Use extra caution when moving to avoid tipping.
- Never try moving this scaffold while standing on it.
- Never move a scaffold with a worker within.
- Do not use powered devices to propel this scaffold. Use extra caution near operating machinery.
- Do not use if the surface is not firm and level.
- Do not use in inclement weather or high winds.
- Maintain a firm grip while climbing.
- Do not modify the scaffold or any of its components.
- Do not use the scaffold as a footbridge.

ASSEMBLY INSTRUCTIONS

1. Erect the scaffold (one or two frames high) by following the manufacturer instructions.
2. Install caster into outrigger and secure it with lock pin. Set caster brake. Repeat with the other casters.
3. Place outrigger to end scaffold frame at a 90° angle to the side brace.
4. Lock outrigger into place by using two locking pins. If you use scaffolding with casters, you must first remove the locking pin of the caster to attach the outrigger and then replace the locking pin to lock the caster and base of the outrigger.
5. Firmly tighten the tightening knob so that the scaffolding and the outrigger are perfectly lined up and united.

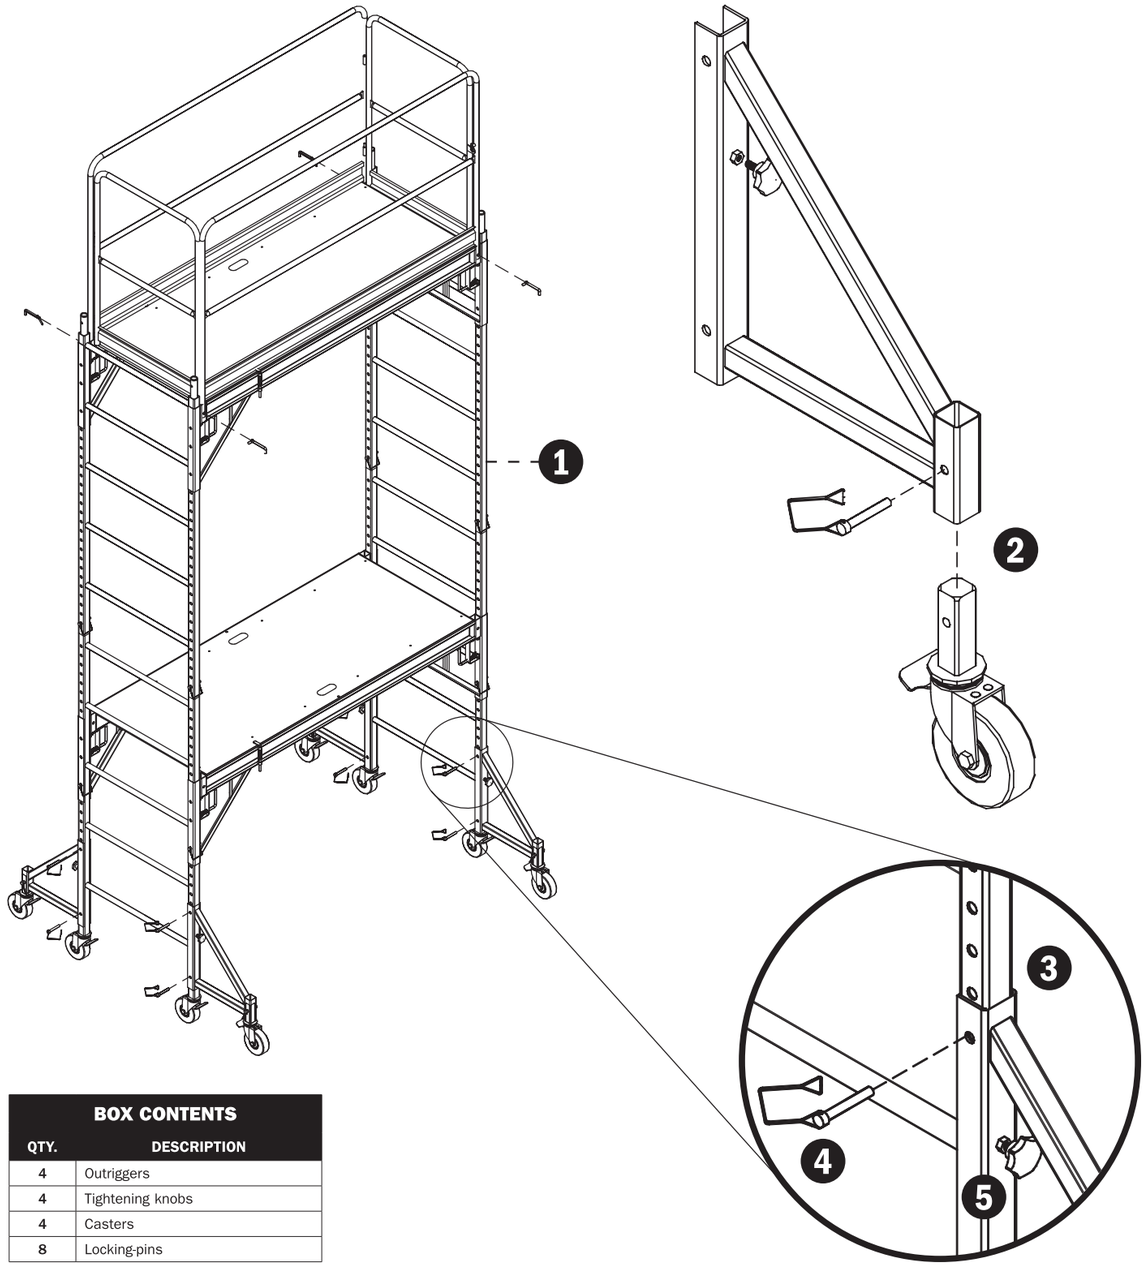

BOX CONTENTS	
QTY.	DESCRIPTION
4	Outriggers
4	Tightening knobs
4	Casters
8	Locking-pins